

FIG.1 PRIOR ART

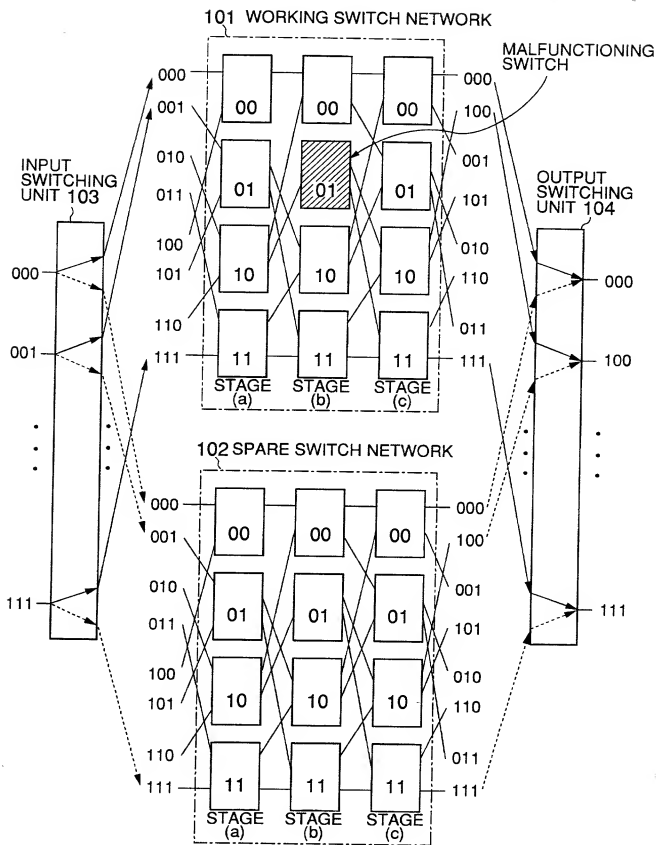


FIG.2

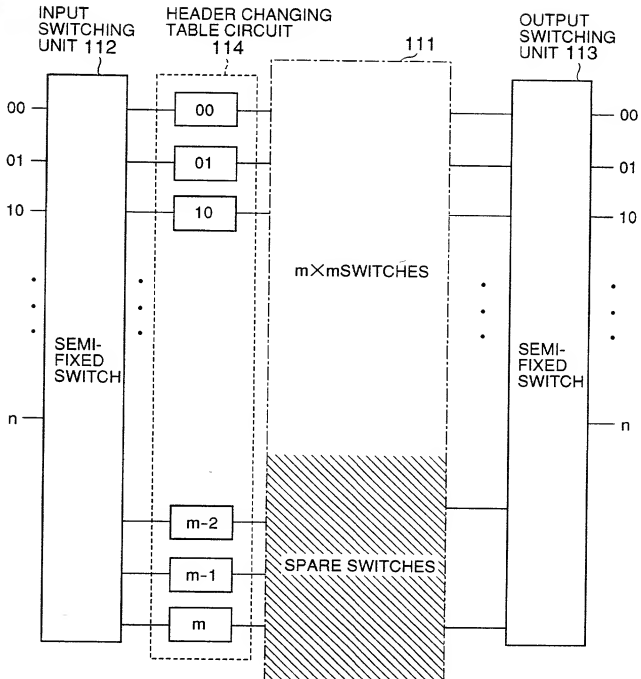


FIG.3

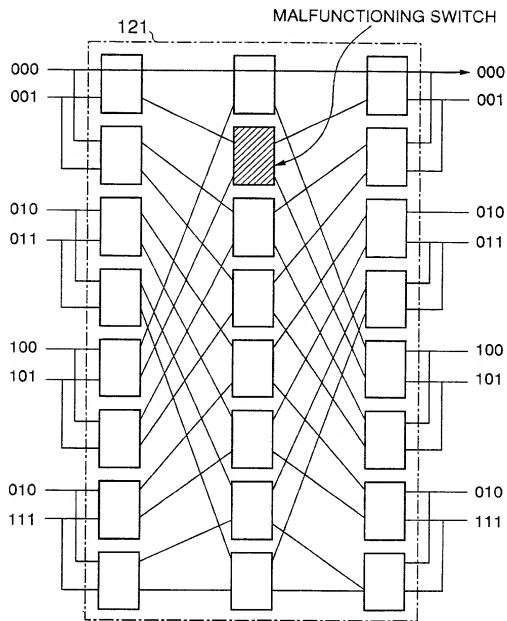


FIG.4

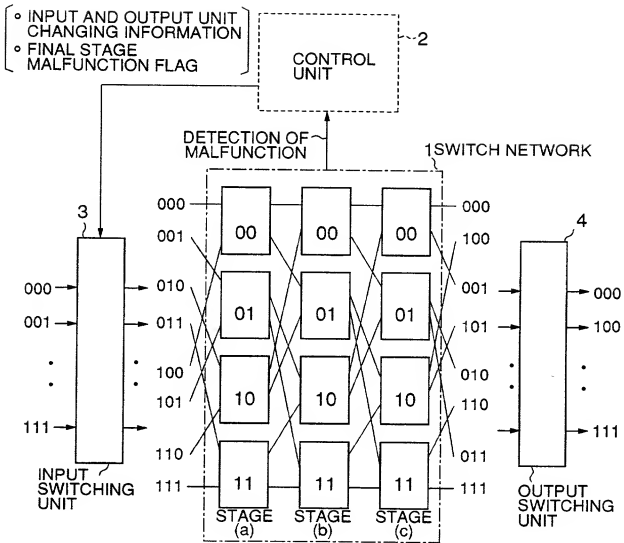


FIG.5

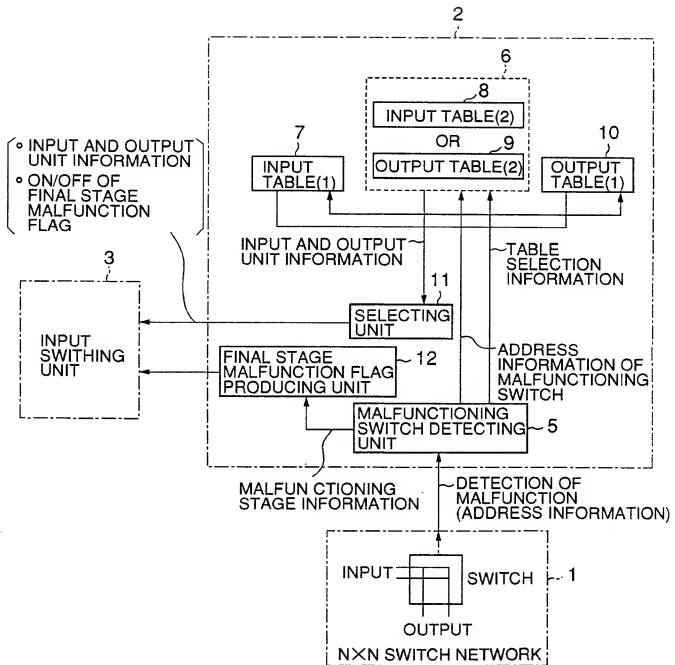


FIG.6A

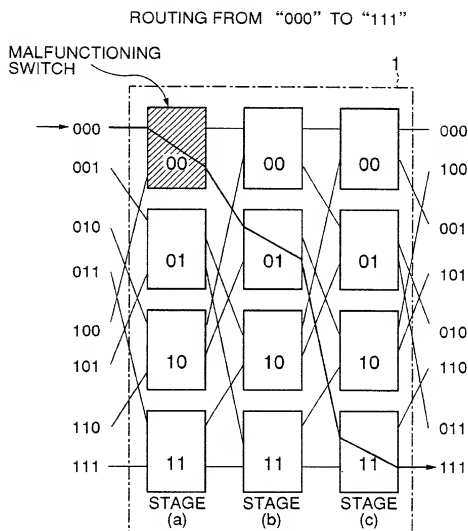


FIG.6B

* : DONT CARE BIT

☐ : SELECTED SWITCH

INPUT TABLE(1)

INPUT ADDRESS	MALFUNCTIONING SWITCH ADDRESS	INPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	INPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	INPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	INPUT ADDRESS AFTER CHANGE
* 00	00	OTHER THAN *00	01	NO CHANGE	10	NO CHANGE	11	NO CHANGE
* 01		NO CHANGE		OTHER THAN *01		NO CHANGE		NO CHANGE
* 10		NO CHANGE		NO CHANGE		OTHER THAN *10		NO CHANGE
* 11		NO CHANGE		NO CHANGE		NO CHANGE		OTHER THAN *11

FIG.6C

2X2 SWITCH ADDRESS

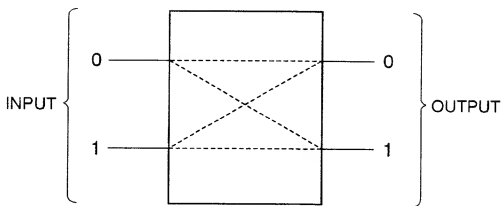


FIG.7A

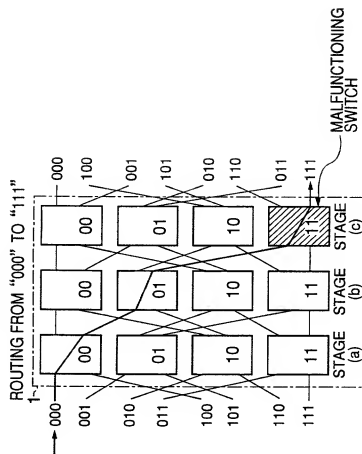


FIG.7B

OUTPUT TABLE(i)

INPUT ADDRESS	MALFUNCTIONING SWITCH ADDRESS	OUTPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	OUTPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	OUTPUT ADDRESS AFTER CHANGE
*00	00	OTHER THAN *00	01	NO CHANGE	10	NO CHANGE
*01		NO CHANGE		OTHER THAN *01		NO CHANGE
*10		NO CHANGE		NO CHANGE		OTHER THAN *10
*11	11	NO CHANGE	NO CHANGE	NO CHANGE	NO CHANGE	OTHER THAN *11
		NO CHANGE		OTHER THAN *10		OTHER THAN *11
		NO CHANGE		NO CHANGE		OTHER THAN *11

*: DONT CARE BIT

☐: SELECTED SWITCH

FIG.8A

ROUTING FROM "000" TO "111"

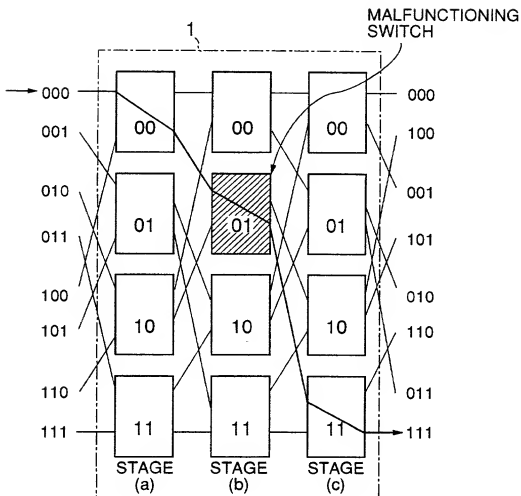


FIG.8B

*: DONT CARE BIT
☒: SELECTED SWITCH

INPUT TABLE(2)

INPUT ADDRESS	MALFUNCTIONING SWITCH ADDRESS	INPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	INPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	INPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	INPUT ADDRESS AFTER CHANGE
000	00	NO CHANGE	01	OTHER THAN **0	10	NO CHANGE	11	NO CHANGE
001		NO CHANGE		NO CHANGE		NO CHANGE		OTHER THAN **1
010		NO CHANGE		OTHER THAN **0		NO CHANGE		NO CHANGE
011		NO CHANGE		NO CHANGE		NO CHANGE		OTHER THAN **1
100		NO CHANGE		OTHER THAN **0		NO CHANGE		NO CHANGE
101		NO CHANGE		NO CHANGE		NO CHANGE		OTHER THAN **1
110		NO CHANGE		OTHER THAN **0		NO CHANGE		NO CHANGE
111		NO CHANGE		NO CHANGE		NO CHANGE		OTHER THAN **1

FIG.9A

ROUTING FROM "000" TO "111"

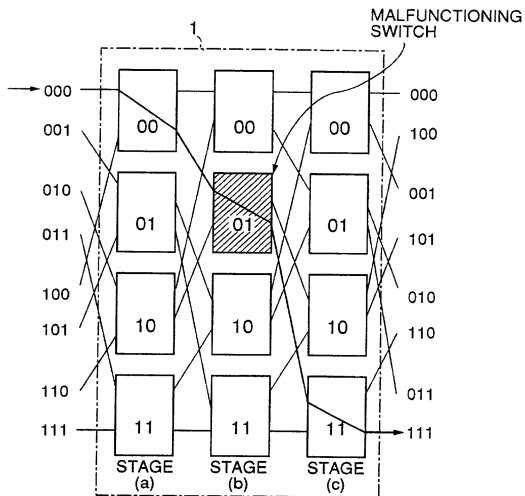


FIG.9B

*: DONT CARE BIT

☐: SELECTED SWITCH

OUTPUT TABLE(2)

OUTPUT ADDRESS	MALFUNCTIONING SWITCH ADDRESS	OUTPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	OUTPUT ADDRESS AFTER CHANGE	MALFUNCTIONING SWITCH ADDRESS	OUTPUT ADDRESS AFTER CHANGE
000	00	OTHER THAN 0**	01	NO CHANGE	10	NO CHANGE
001		OTHER THAN 0**		NO CHANGE		NO CHANGE
010		OTHER THAN 0**		NO CHANGE		NO CHANGE
011		OTHER THAN 0**		NO CHANGE		NO CHANGE
100		NO CHANGE	11	OTHER THAN 1**		NO CHANGE
101		NO CHANGE		OTHER THAN 1**		NO CHANGE
110		NO CHANGE		OTHER THAN 1**		NO CHANGE
111		NO CHANGE		OTHER THAN 1**		NO CHANGE

FIG.10

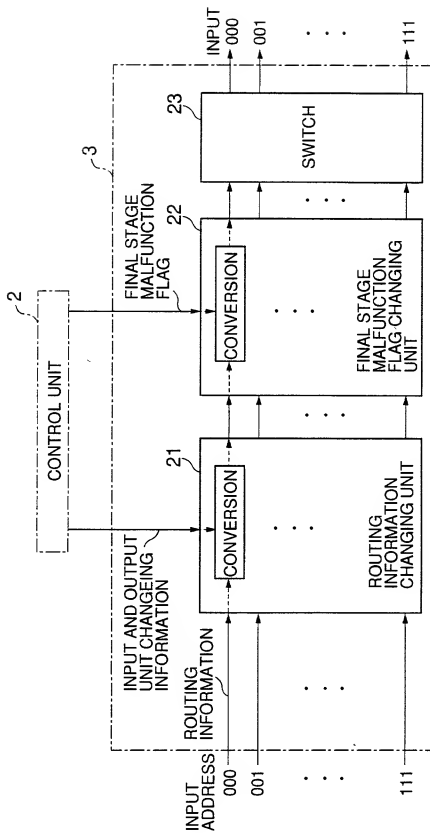


FIG.11

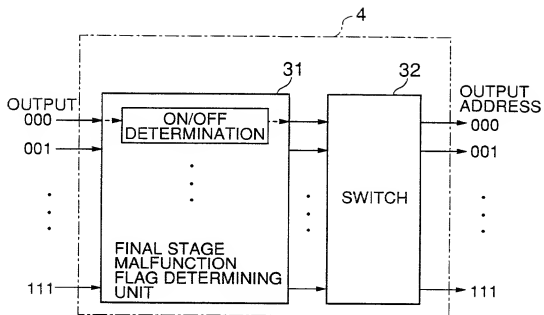


FIG.12A

FRAME FORMAT IN INPUT SWITCHING UNIT

- * : DONT CAR BIT
- ▨ : SELECTED ROUTING INFORMATION

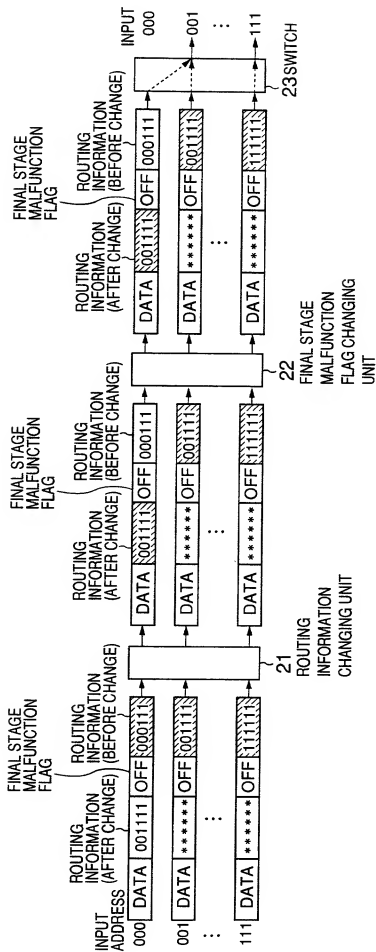


FIG.13A

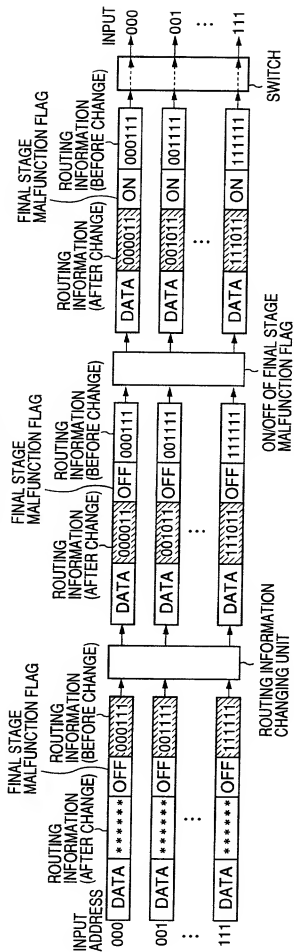


FIG.13B

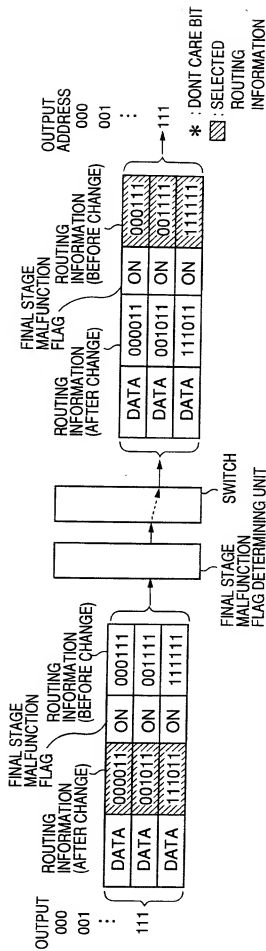


FIG.14

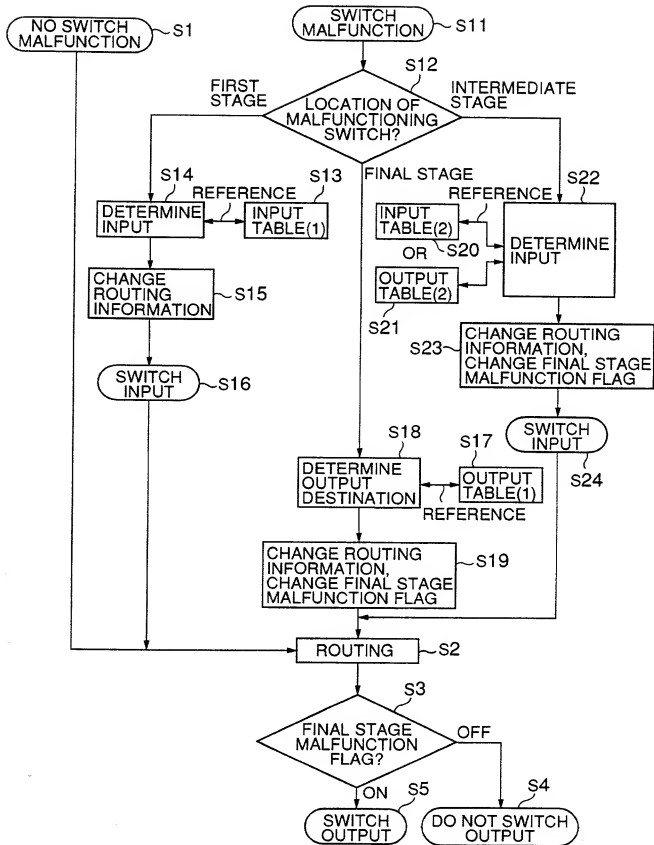


FIG.15A

ROUTING FROM "000" TO "111" (BEFOR CHANGE)

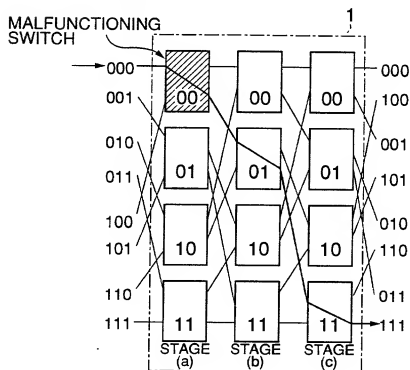


FIG.15B

ROUTING FROM "000" TO "111" (AFTER CHANGE)

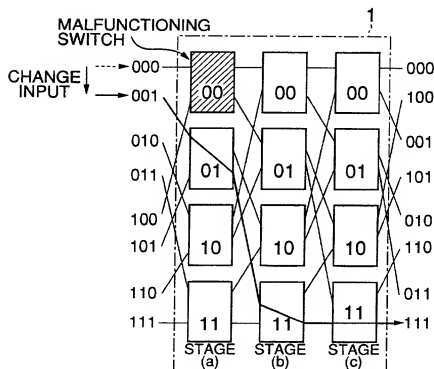


FIG.16A

ROUTING FROM "000" TO "111" (BEFOR CHANGE)

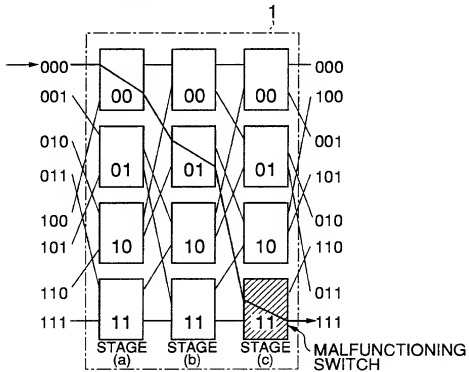


FIG.16B

ROUTING FROM "000" TO "111" (AFTER CHANGE)

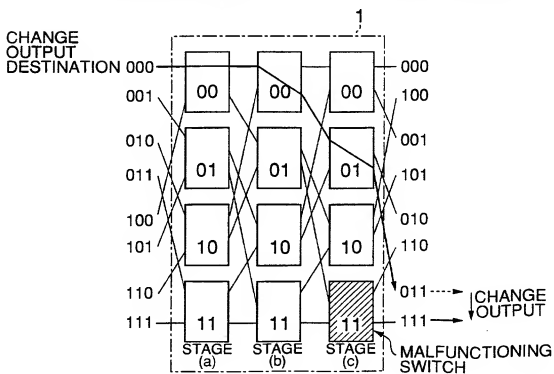


FIG.17A

ROUTING FROM "000" TO "111" (BEFOR CHANGE)

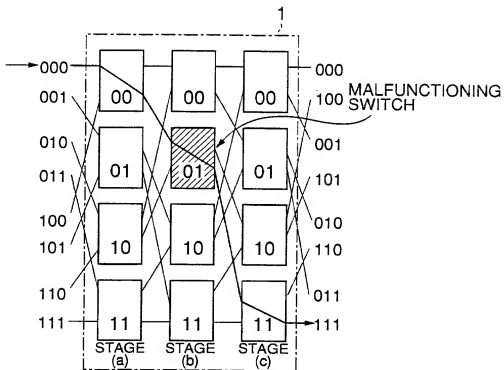


FIG.17B

ROUTING FROM "000" TO "111" (AFTER CHANGE)

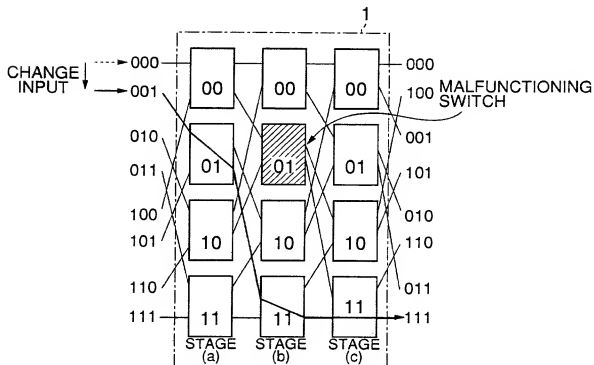


FIG.18A

ROUTING FROM "000" TO "111" (BEFOR CHANGE)

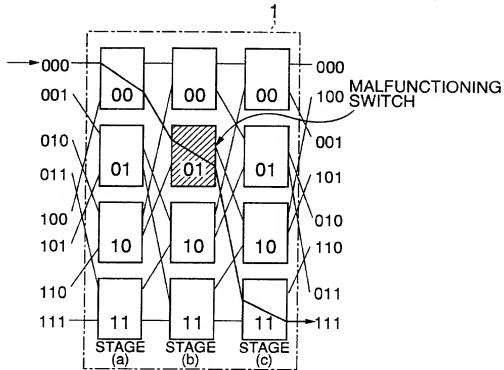


FIG.18B

ROUTING FROM "000" TO "111" (AFTER CHANGE)

